

FYT-18 3dBi 2.4G Mini Antenna

FEATURES



- Designed for both Indoor & Outdoor applications
- Ground Plane dependent
- Full 2.4G backward compatibility
- 3.01 dBi Peak Gain
- Small Form Factor



The MyAntenna FYT-18 range of antennas are designed to decrease the lifetime cost of M2M and mobile device installations by offering a robust, effective antenna that is easy to install and lasts the lifetime of the installation without the need for maintenance.

PRODUCTS


Part No.	Weight	Dimensions (L x W x H)	Connector	Color
(F12E00507A0) M02-0600210R0A	1.8g	Φ9.2*27.8mm	SMA-Male	Black

SPECIFICATIONS


PARAMETER	SPECIFICATION
Frequency Bands, MHz	2400-2500
VSWR (Max)	3.0:1
Peak Gain, dBi (Typ)	Up to 3.01
Nominal Impedance	50 Ω
Max Power (ambient temp of 25°C)	10 Watts
Azimuth Beam Width (deg)	Omnidirectional
Polarization	Linear
Radome	TPE, Black
Storage Temperature Range (°C)	-40° C to +85° C
Operational Temperature Range (°C)	-30° C to +80° C
Material Substance Compliance	REACH/RoHS Compliant
HSCODE	8517707090
USHSCODE	8517620010
UPC	

ELECTRICAL DATA


Return Loss

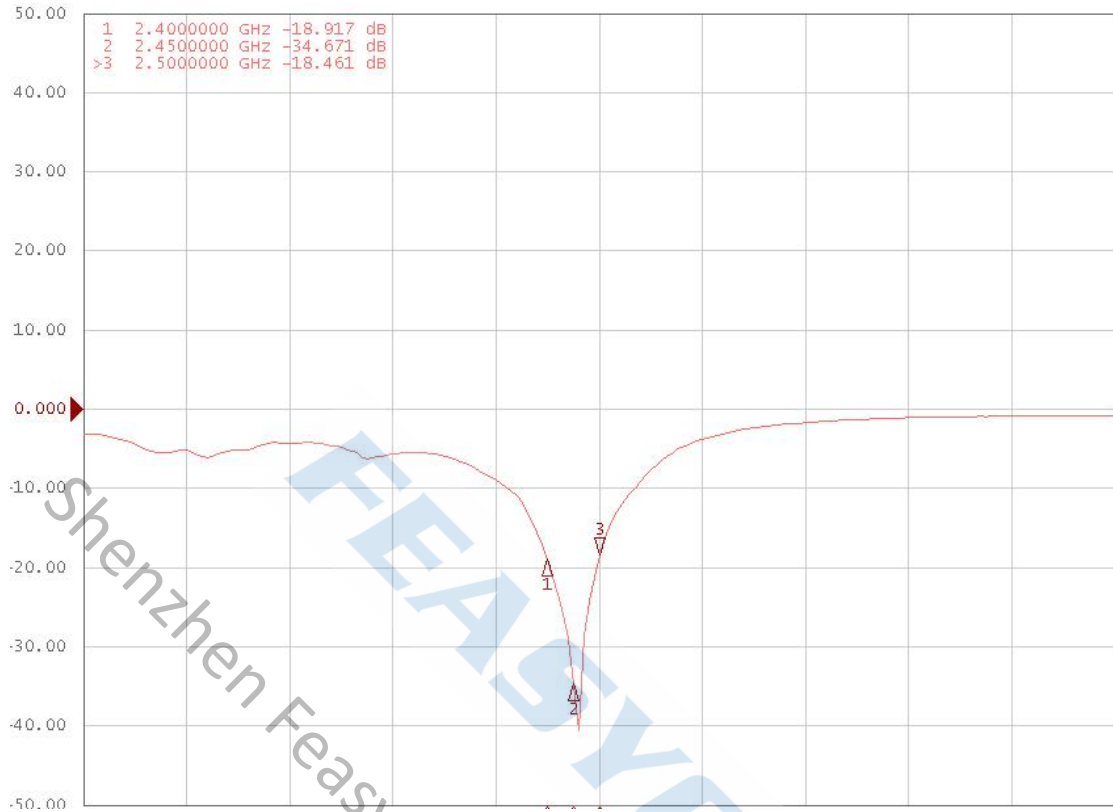

Efficiency (%)

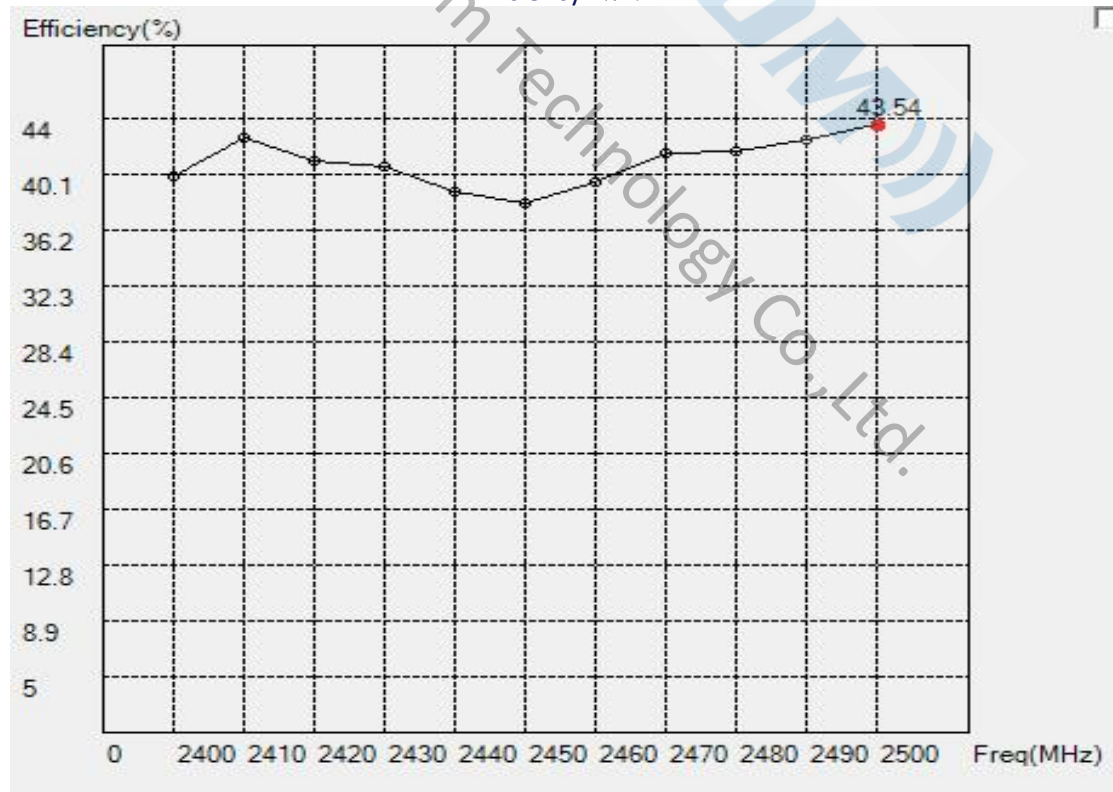


Peak Gain (dBi)

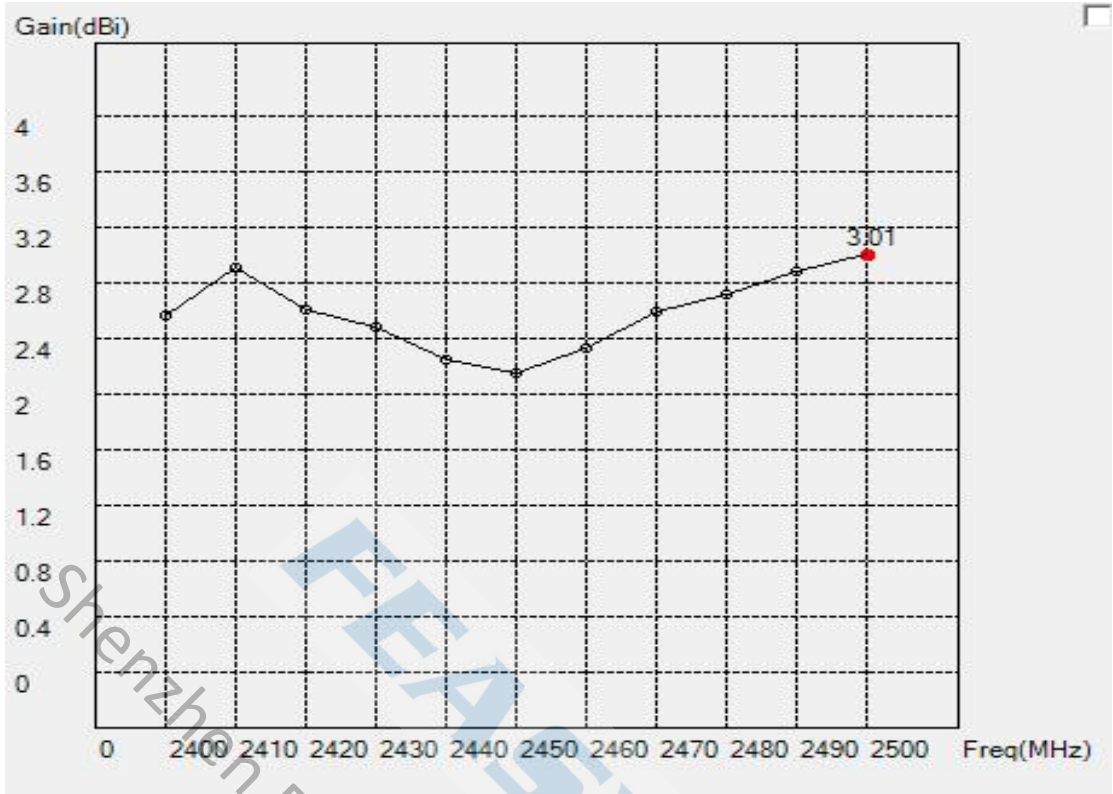

RADIATION PATTERNS

2D Radiation Pattern at 2450MHz

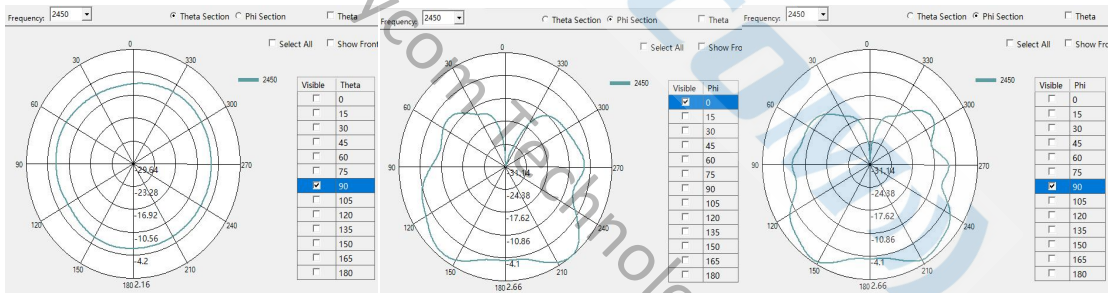

HOUSING CONFIGURATIONS

